

Control Panel, type CTMSP/2T

With frame, for wall-recessed housings
(55mm Ø) VDE boxes or BS 1-gang boxes

Order-No.: 51.01.312

Slider with 2 pushbutton for the control of
AQ dimmers or AQ-Controls. The pushbuttons can
be used for ON/OFF switching or a ‚Take‘ control
from two places (optional with LED indication, 24 V

All connections wired on screw terminals.

Coverplates and frames plug-on type, without screws
(see page 26).


With frame and aluminium anodized plate.



Technical data:

Characterization	Control panel CTMSP/2T
Type	: CTMSP/2T
Order-no.	: 51.01.312
Max. contact	: 28V AC/DC / 100 mA
Ambient temperature	: max. 45°C, natural air-convection
Terminals	: 0,5-1,5mm ² solid wire or litz wire with sleeve
Wire length	: max. 100 m
Slider resistance	: 22 kV/lin.
Design	: panel face and frame aluminium anodized
Dimensions	: (WxHxD) 83x83x40 mm
Weight	: approx. 100 gr
Protective type	: IP 00
Contamination degree:	2 (dry, non-conductive according to IEC 664, 10/92)
Requirements	: EMC met accord. to EN 61547 4/96 Low-voltage met according to IEC 669-2-1 11/94

Dimensional drawing CTMSP/2T

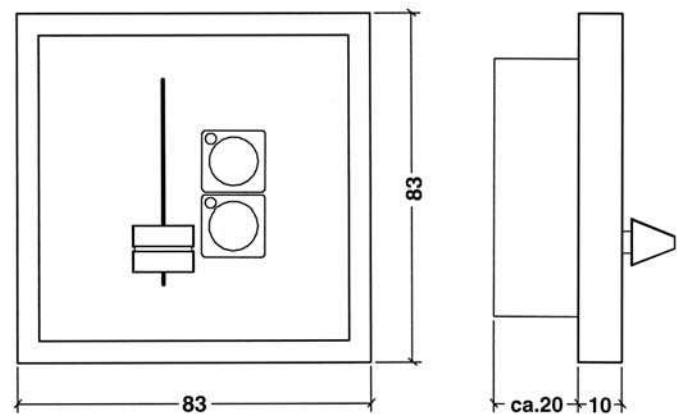

Wiring diagram

